

Washing system – Hot Water Single Pump to 130 Bar 2-4 Lt/min


1.3



Calidus 130/4 is a **high pressure** washing unit that produces hot water, specifically created by **VEMA** to meet the needs of food stores and small/medium shops. The frame, the equipped pump and all control components used are integrally formed in stainless steel, with the aim to meet the expectations of the final user and ensure reliability in the long run without comparisons, everything combined with low noise.

The limited **water consumption of MAX 4 lt/min**, the **maximum temperature of 80 ° C**, which is exclusively generated by an **electric resistance of 9 kw**, and the total absence of aerosols are combined to a great ease of use that allows to easily remove any residue or contamination. The limited supply of water, also allows the use even in environments where discharges points are not installed.

Water can be collected with simple dry/wet vacuum cleaners. **The system includes high-pressure 15 m hose, gun with "Total Stop" function, dedicated lance complete with nozzle and compressed air injector for foaming operations.**

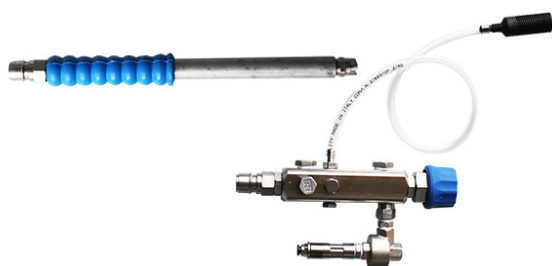

Compressed air foaming
injector
Cod. 10.3564.00

CALIDUS

HIGH PRESSURE HOT WASHING

Washing system – Hot Water Single Pump to 130 Bar 2-4 Lt/min

1.3

Available configurations

CODE	MAX.FLOW RATE (lt/min)	ADJUSTABLE PRESSURE (Bar)	POWER (KW)	VOLTAGE (Volt)	RPM	WEIGHT (Kg)	DIMENSIONS LxHxP (mm)	MAX. IN-LET TEMPERATURE
10.5737.00	4	20 - 130	10	400	1450	40	610x350x350	85 °C

Technical features


- Low Voltage Controls (24 volt)
- Hot/Cold Selector
- Heating water continuously at a constant temperature
- Digital Thermostat
- Over temperature 80 °C
- Pressure adjustment
- Pressure Indicator
- Total Stop
- Pressure Switch Controls
- Safety Valve
- Pump with ceramic pistons and s/s Valve
- IP65 Control Panel
- Water Lack Controls
- S/S Frame



S/s Washing lance cm 70 without nozzle complete of pin Ø14
Sec. 9.4 - Cod. 10.2219.00



S/s nozzle 1/8"
Sec. 9.7

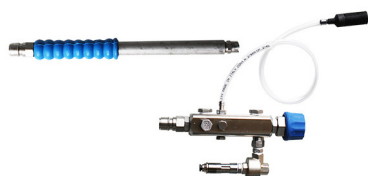

Compressed air foaming
injector
Cod. 10.3564.00



Gun with coupling Ø 14
Sec. 9.9 - Cod. 10.1364.00



Hose H.P. R/2 15mt. Non-staining
3/8" female zinc-plated fittings
Sec. 9.10 - Cod. 10.3534.00